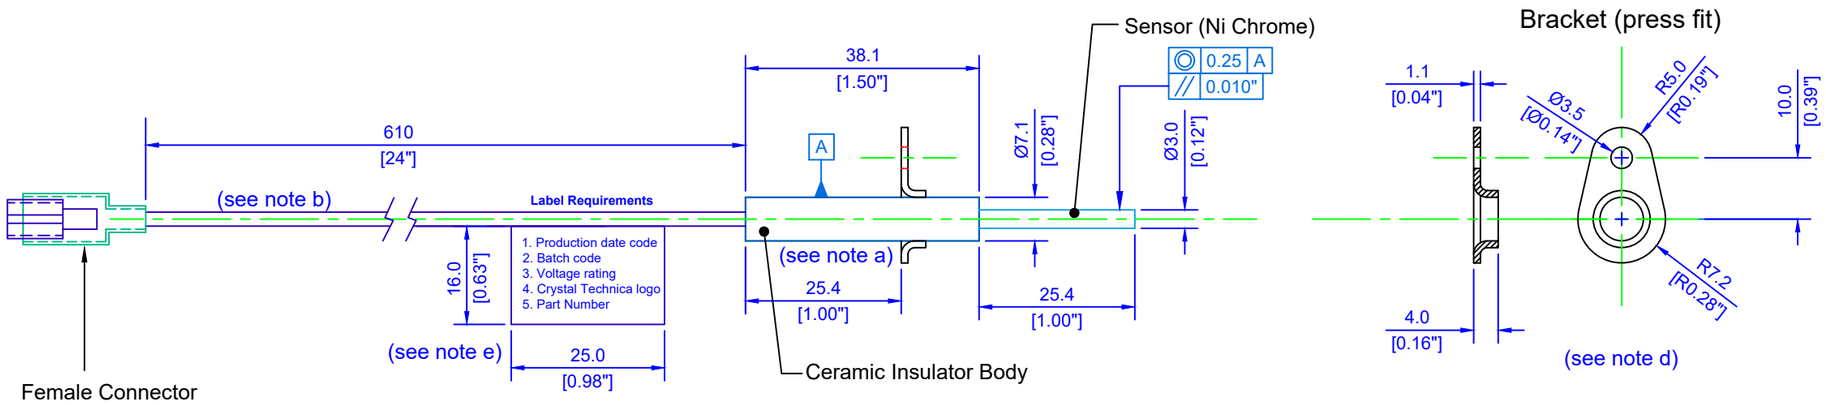


Notes:

a. Ceramic Insulator body non glazed 90%-95% alumina - polished finish
b. Cable - U/L Spec - temperature rating 450°C
c. Every component of this assembly shall withstand a load > = 5Kg
d. Bracket material stainless steel 304 - bright finish
e. All parts to be clean and free access adhesive

Views.
Third Angle Projection

crystal-technica
4 Brunel Buildings, Brunel Road,
Newton Abbot, Devon. UK. TQ12 4PB
technical@crystaltechnica.com.
+44 (0) 1626 214780

Revisions			
Rev.	By	Date	Description

This document is the copyright of Crystal Technica Limited UK and its associated group of companies.

Reproduction of this document, in whole or in part, is prohibited other than with the express permission of the above company.

This drawing not be scaled from in any way.

All Dimension are in millimeters unless stated otherwise

Tolerances

Two place decimals: +/- 0.25

One place decimals: +/- 0.50

Angular tolerance +/- 0.5 degrees

Dimension in brackets ( ) for reference only

CLIENT: SZ-9065902

MASS / WEIGHT: 0.05kg

PROJECT NUMBER:

TITLE: Flame Sensor 120 Volt

MATERIAL: Refer to each component

Status: PRODUCTION

Drawn by: CAD

Checked by: MG

Scale: 1:1 (A3)

Date: 13-06-2024

Drawing no.: GLO7481-4

Rev.: A